
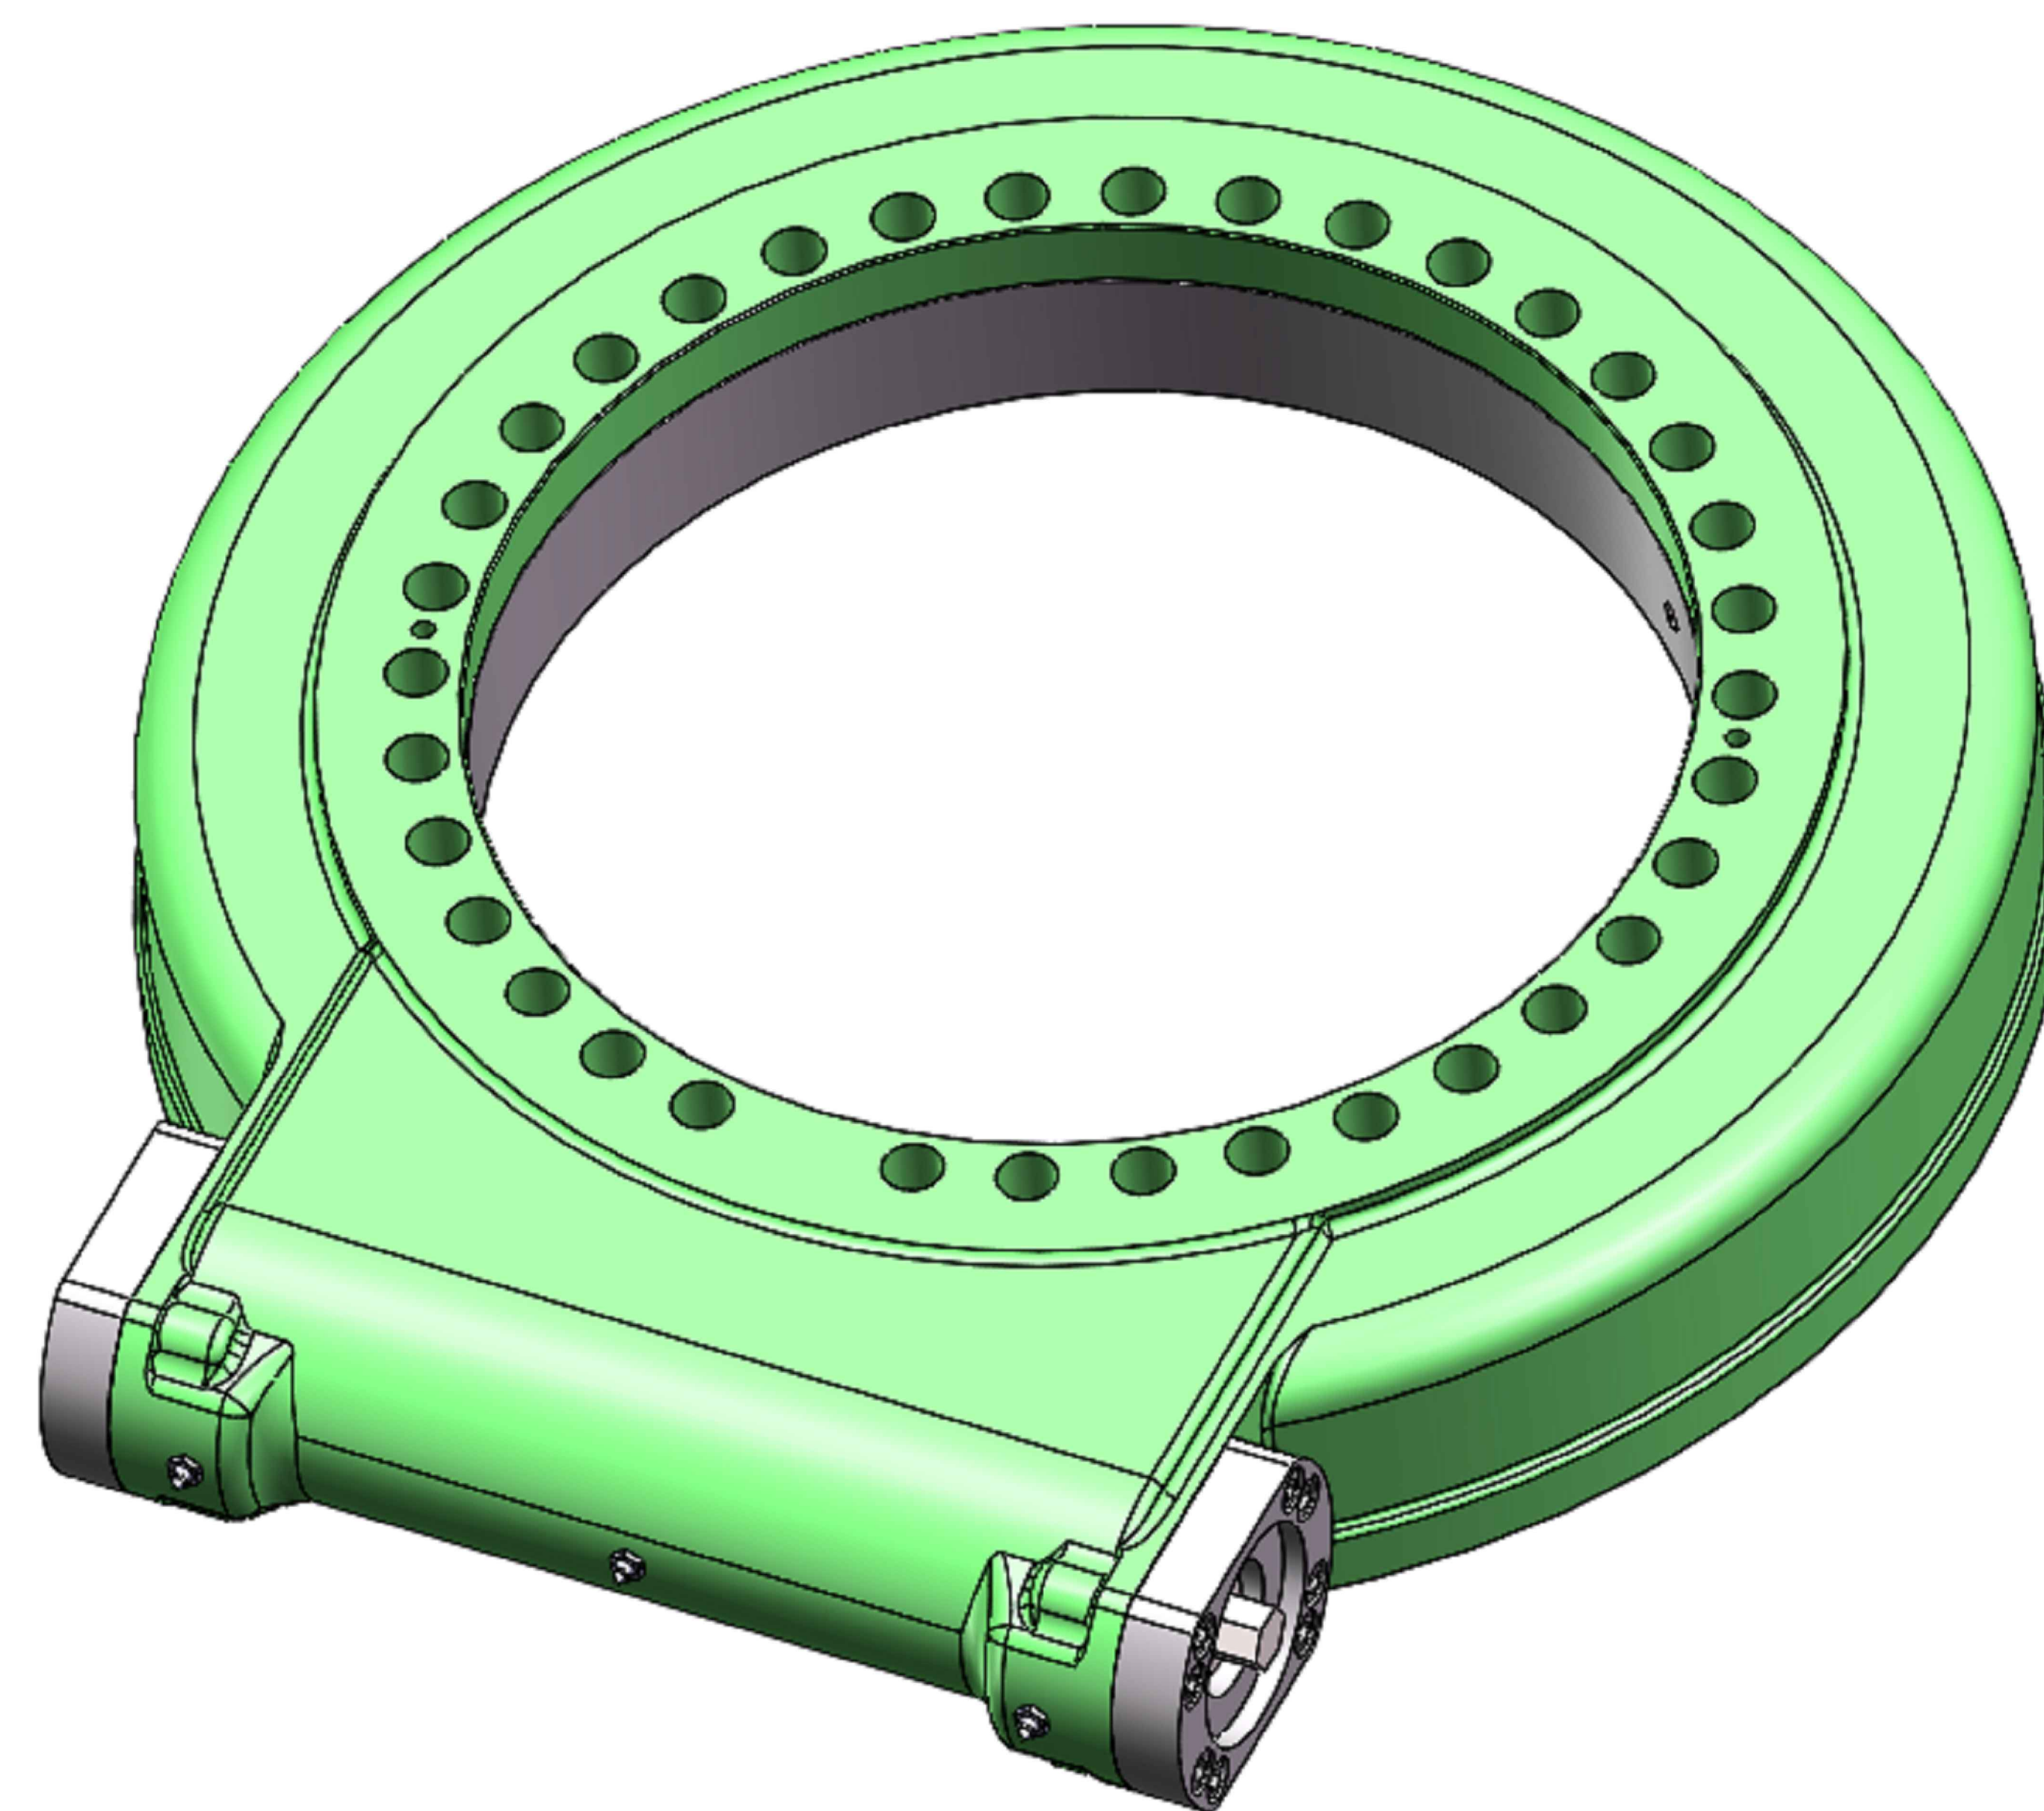


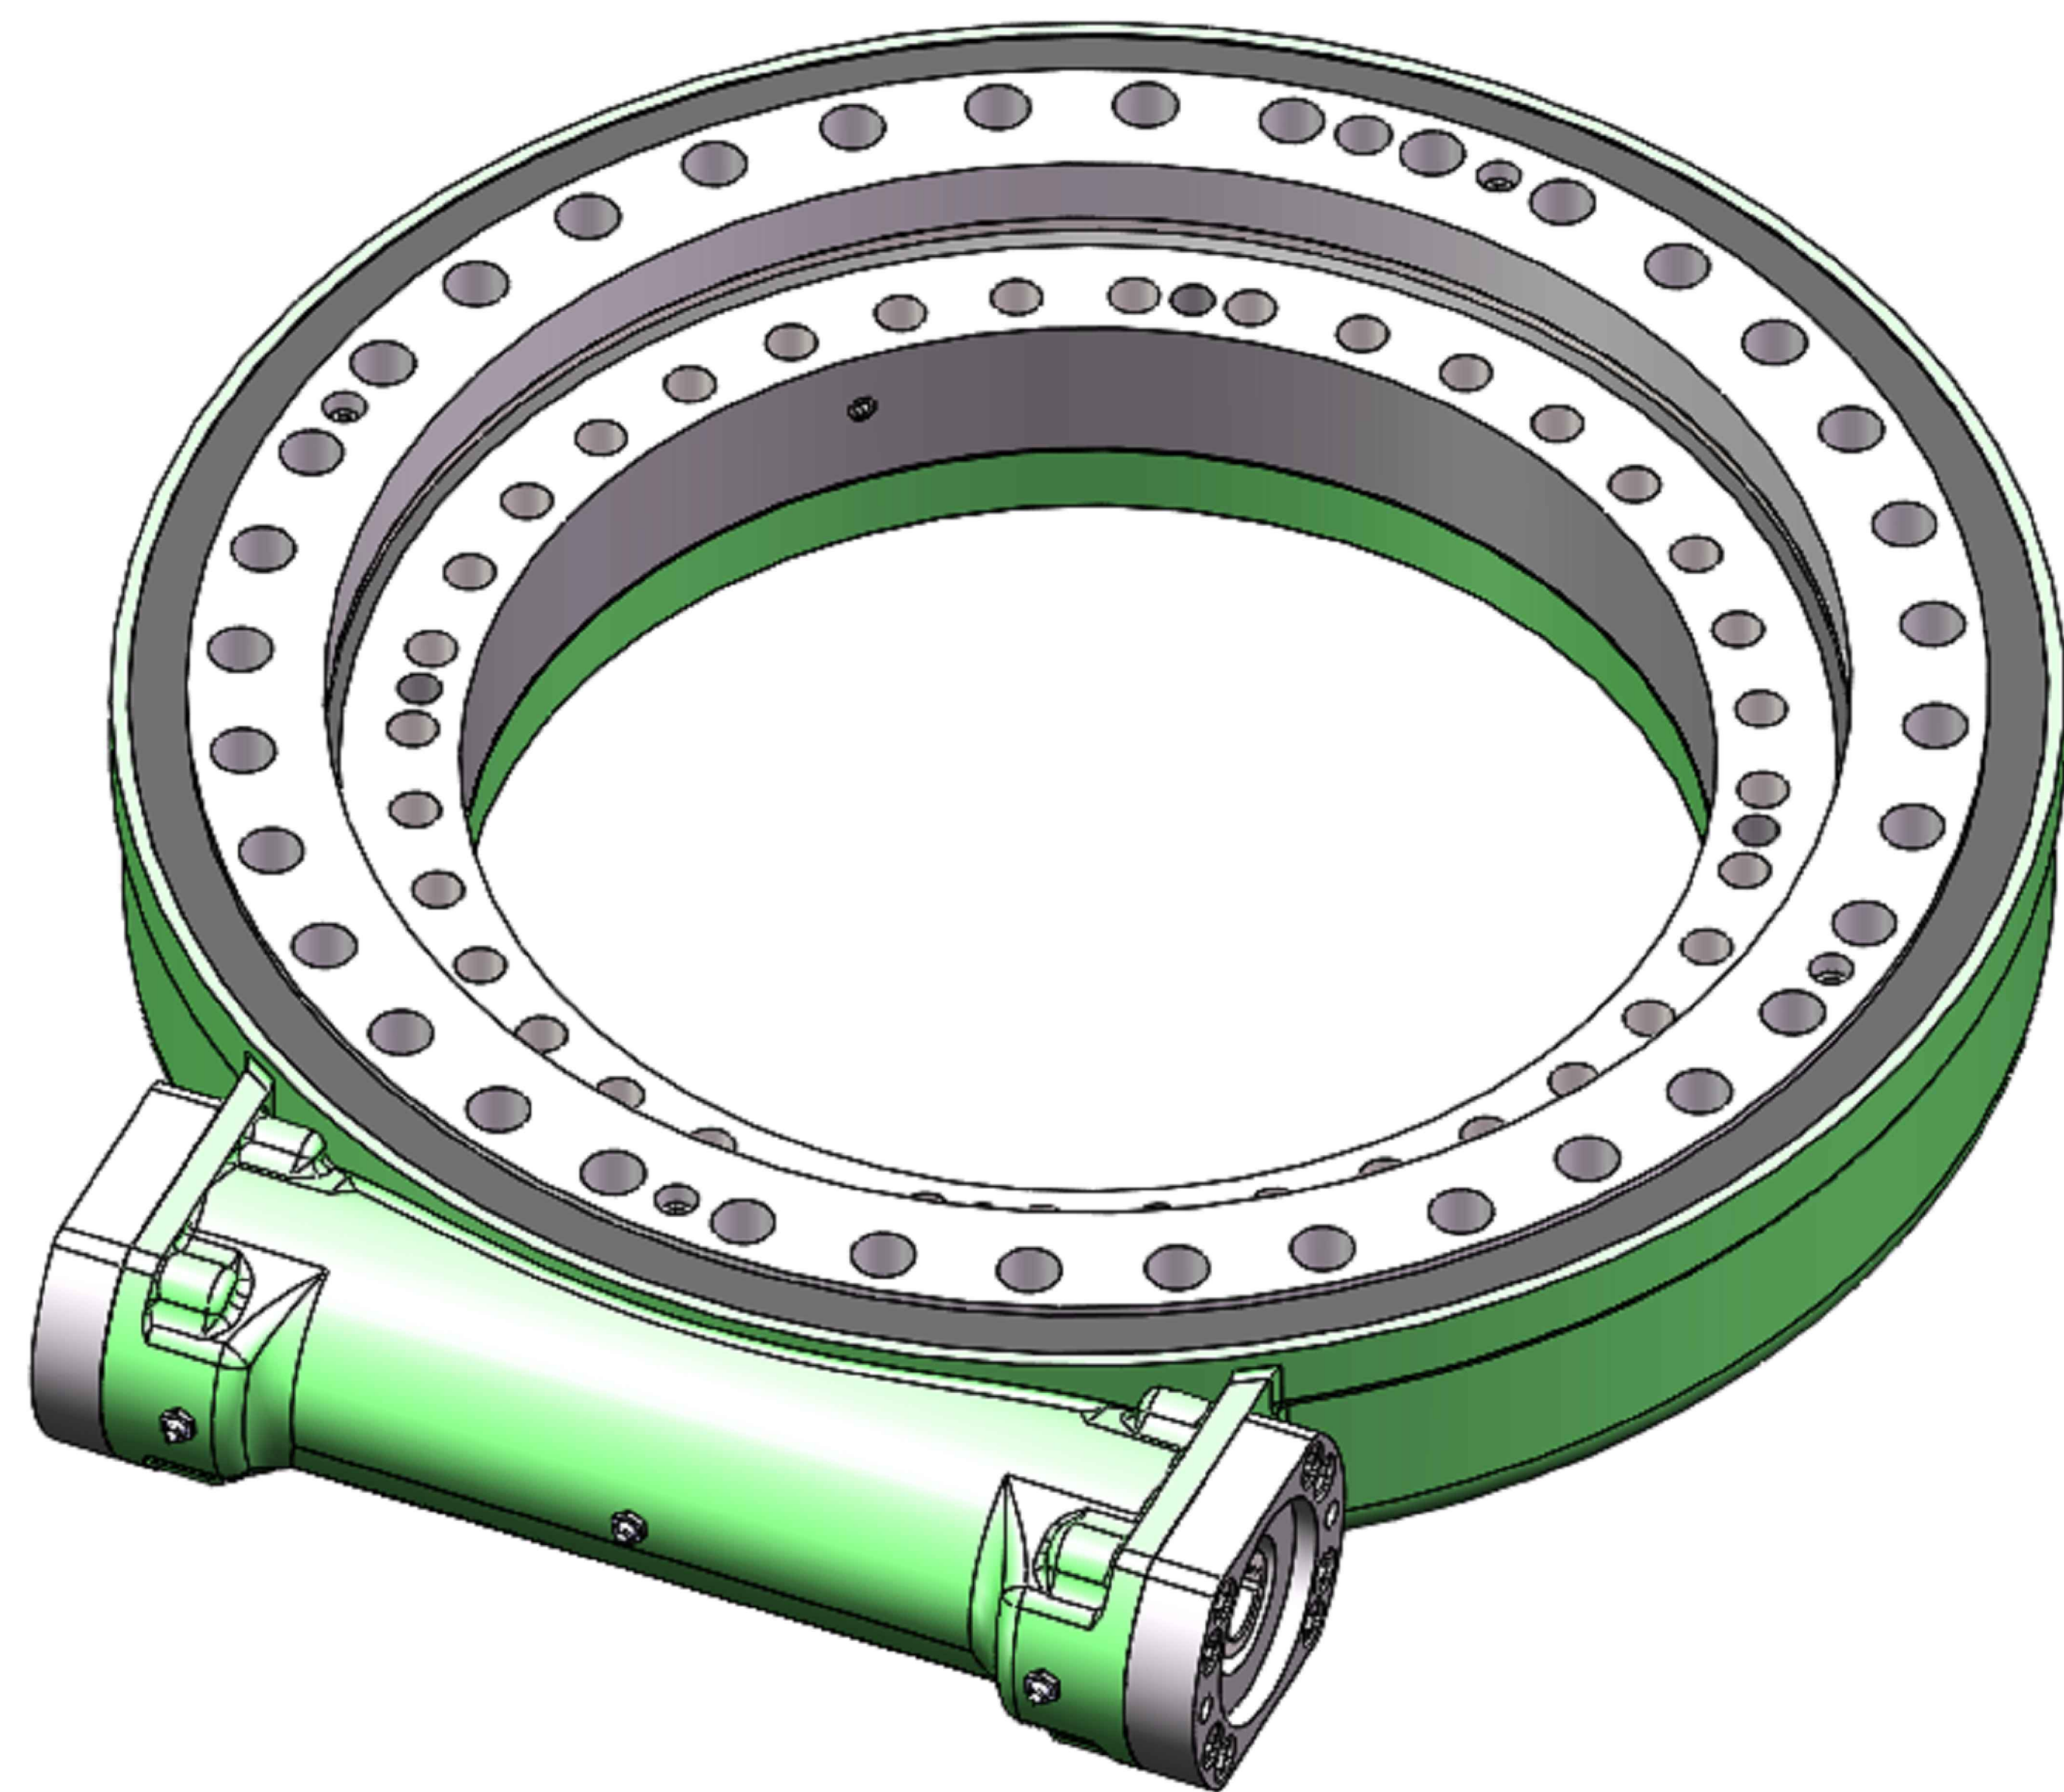

SC21

回转驱动性能参数

Slewing Drive Performance Parameters

减速比	Gear Ratio	125:1	
最大输出转矩	Output Torque (max.)	25 kN.m	18.5×10 ³ lbf.ft
最大倾覆力矩	Tilting Moment (max.)	203 kN.m	149.7×10 ³ lbf.ft
保持力矩	Holding Torque	105.8 kN.m	78×10 ³ lbf.ft
轴向静载荷	Static Axial Load Rating	1598 kN	359.6×10 ³ lbf
径向静载荷	Static Radial Load Rating	640 kN	144×10 ³ lbf
机械效率	Mechanical Efficiency	40%	
自锁性	Self-locking	可靠的静态自锁Reliable static self-locking	
精度	Precision	≤0.2°	
防护等级	IP Class	IP65	

承载力矩图
MOMENT LOAD CHART
轴向载荷 & 倾覆力矩
Axial Load & Tilting Moment

