
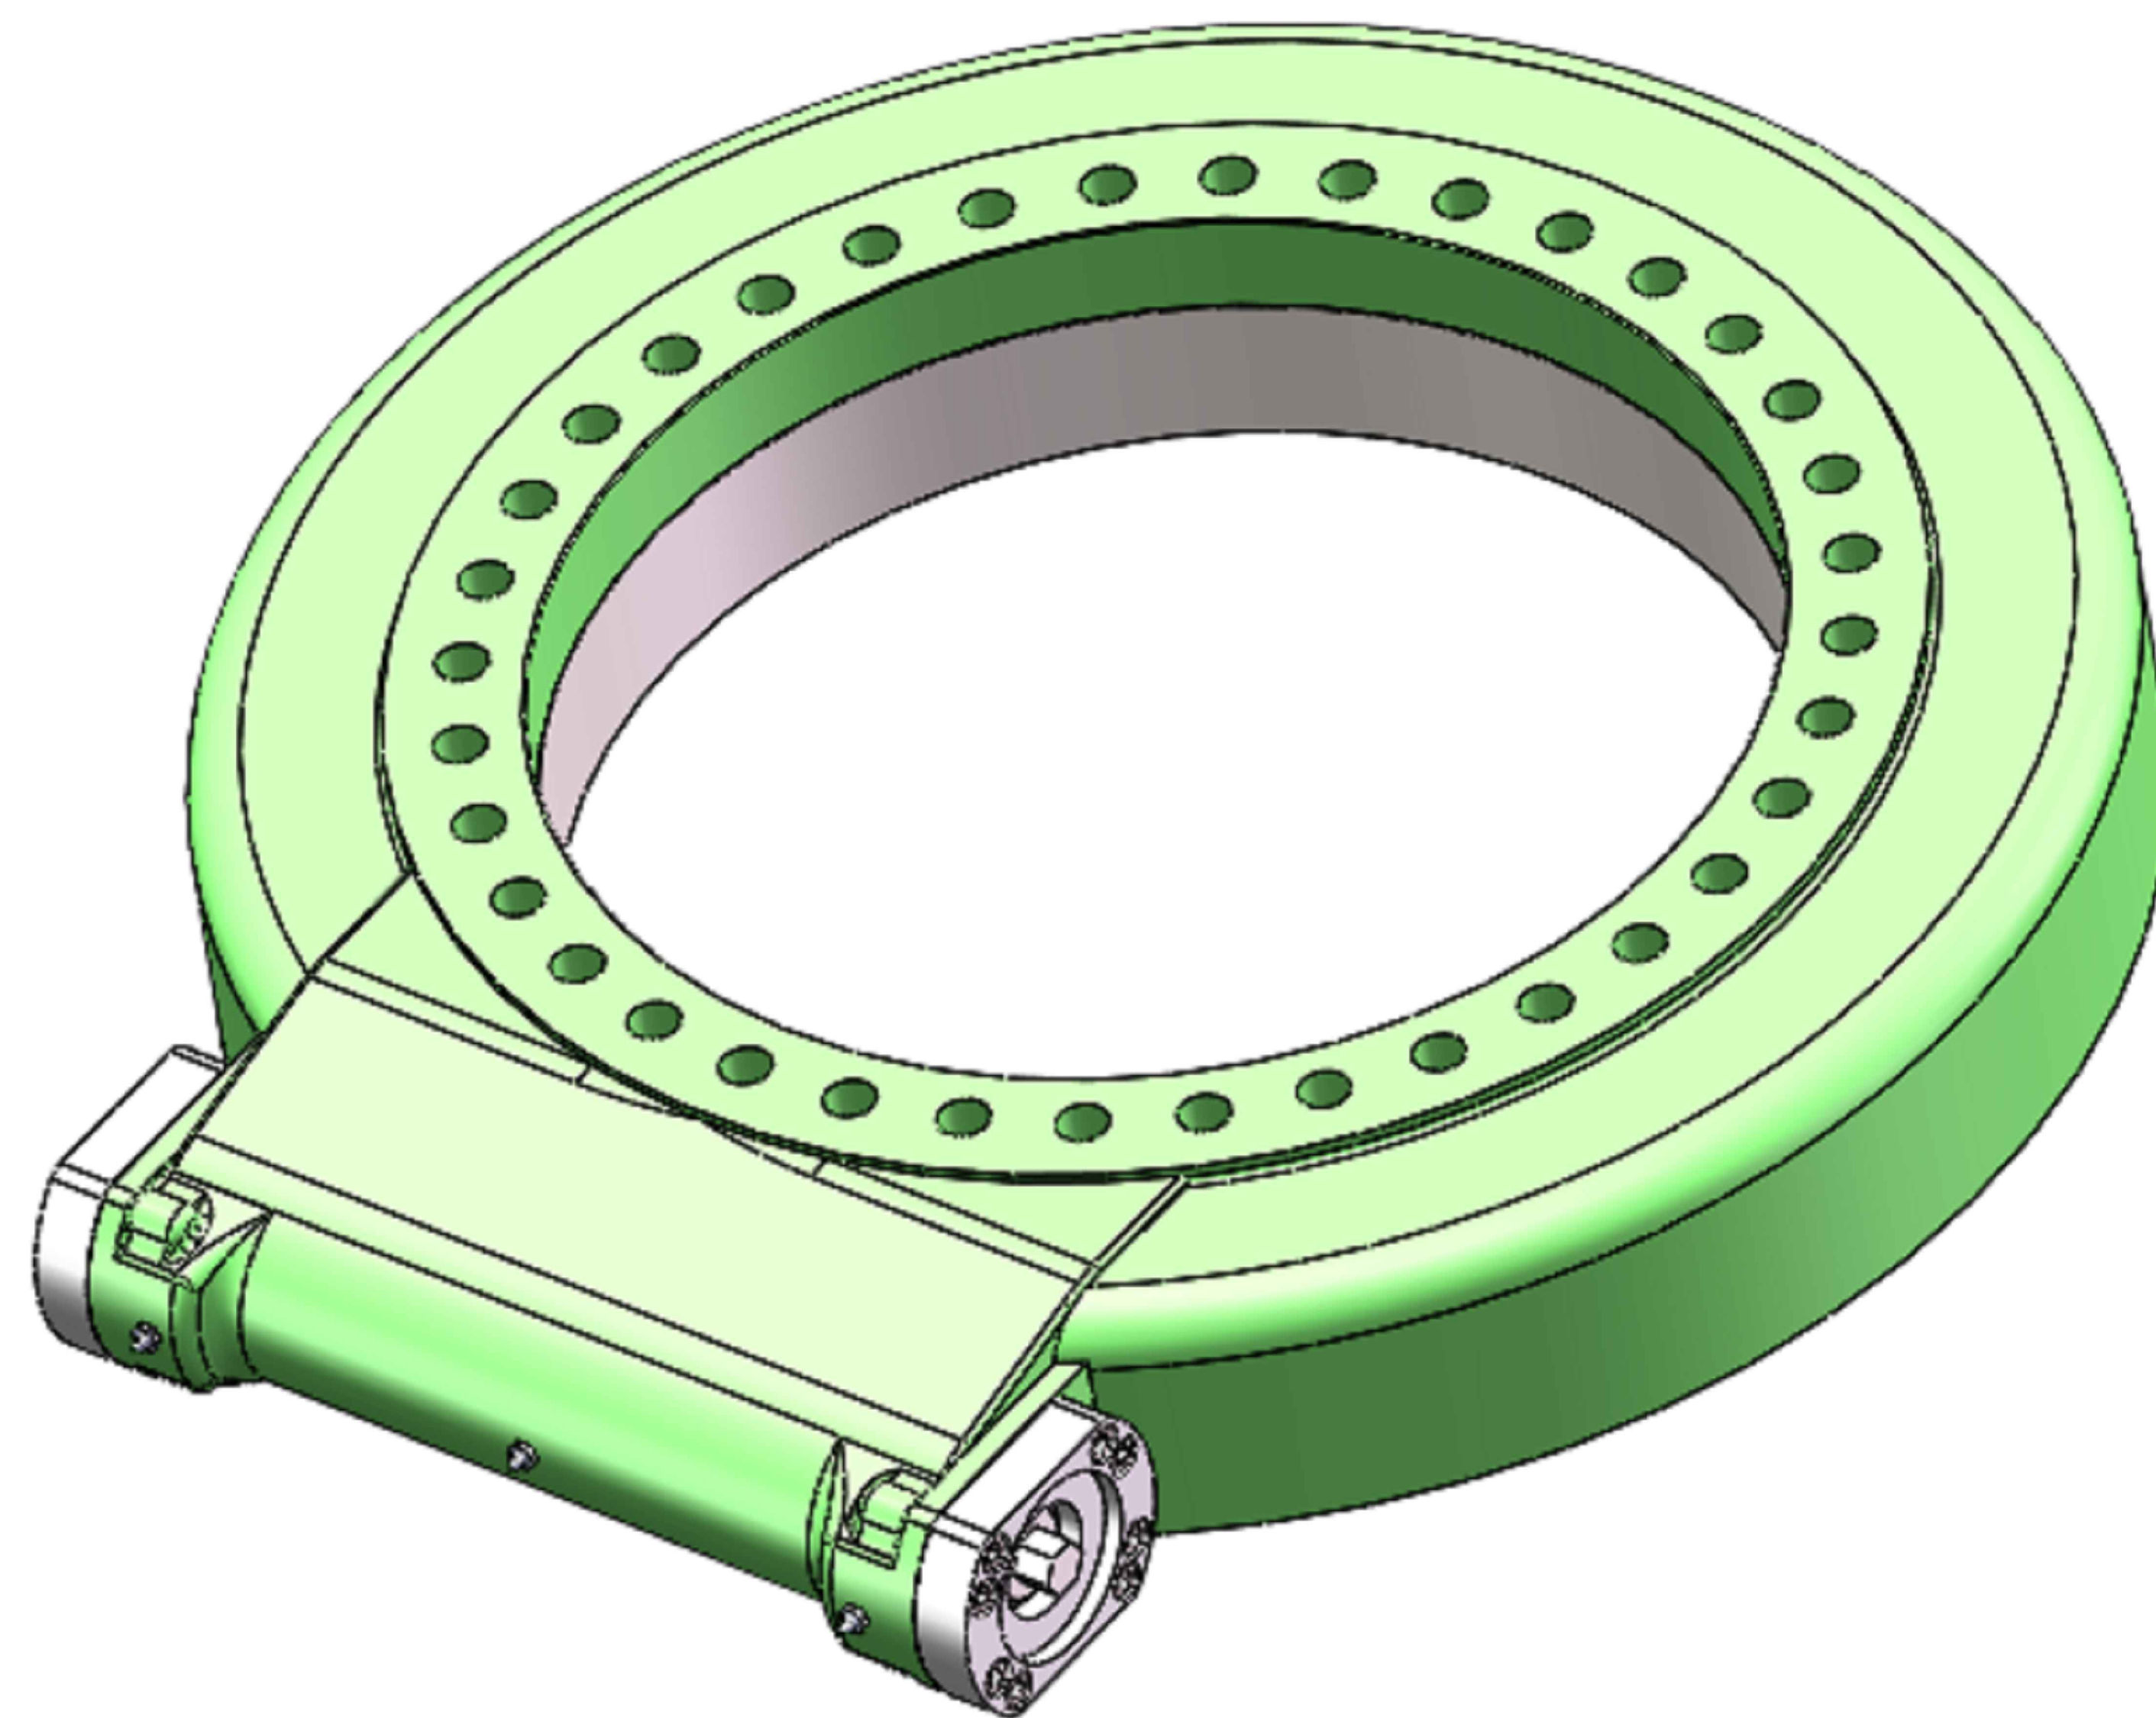


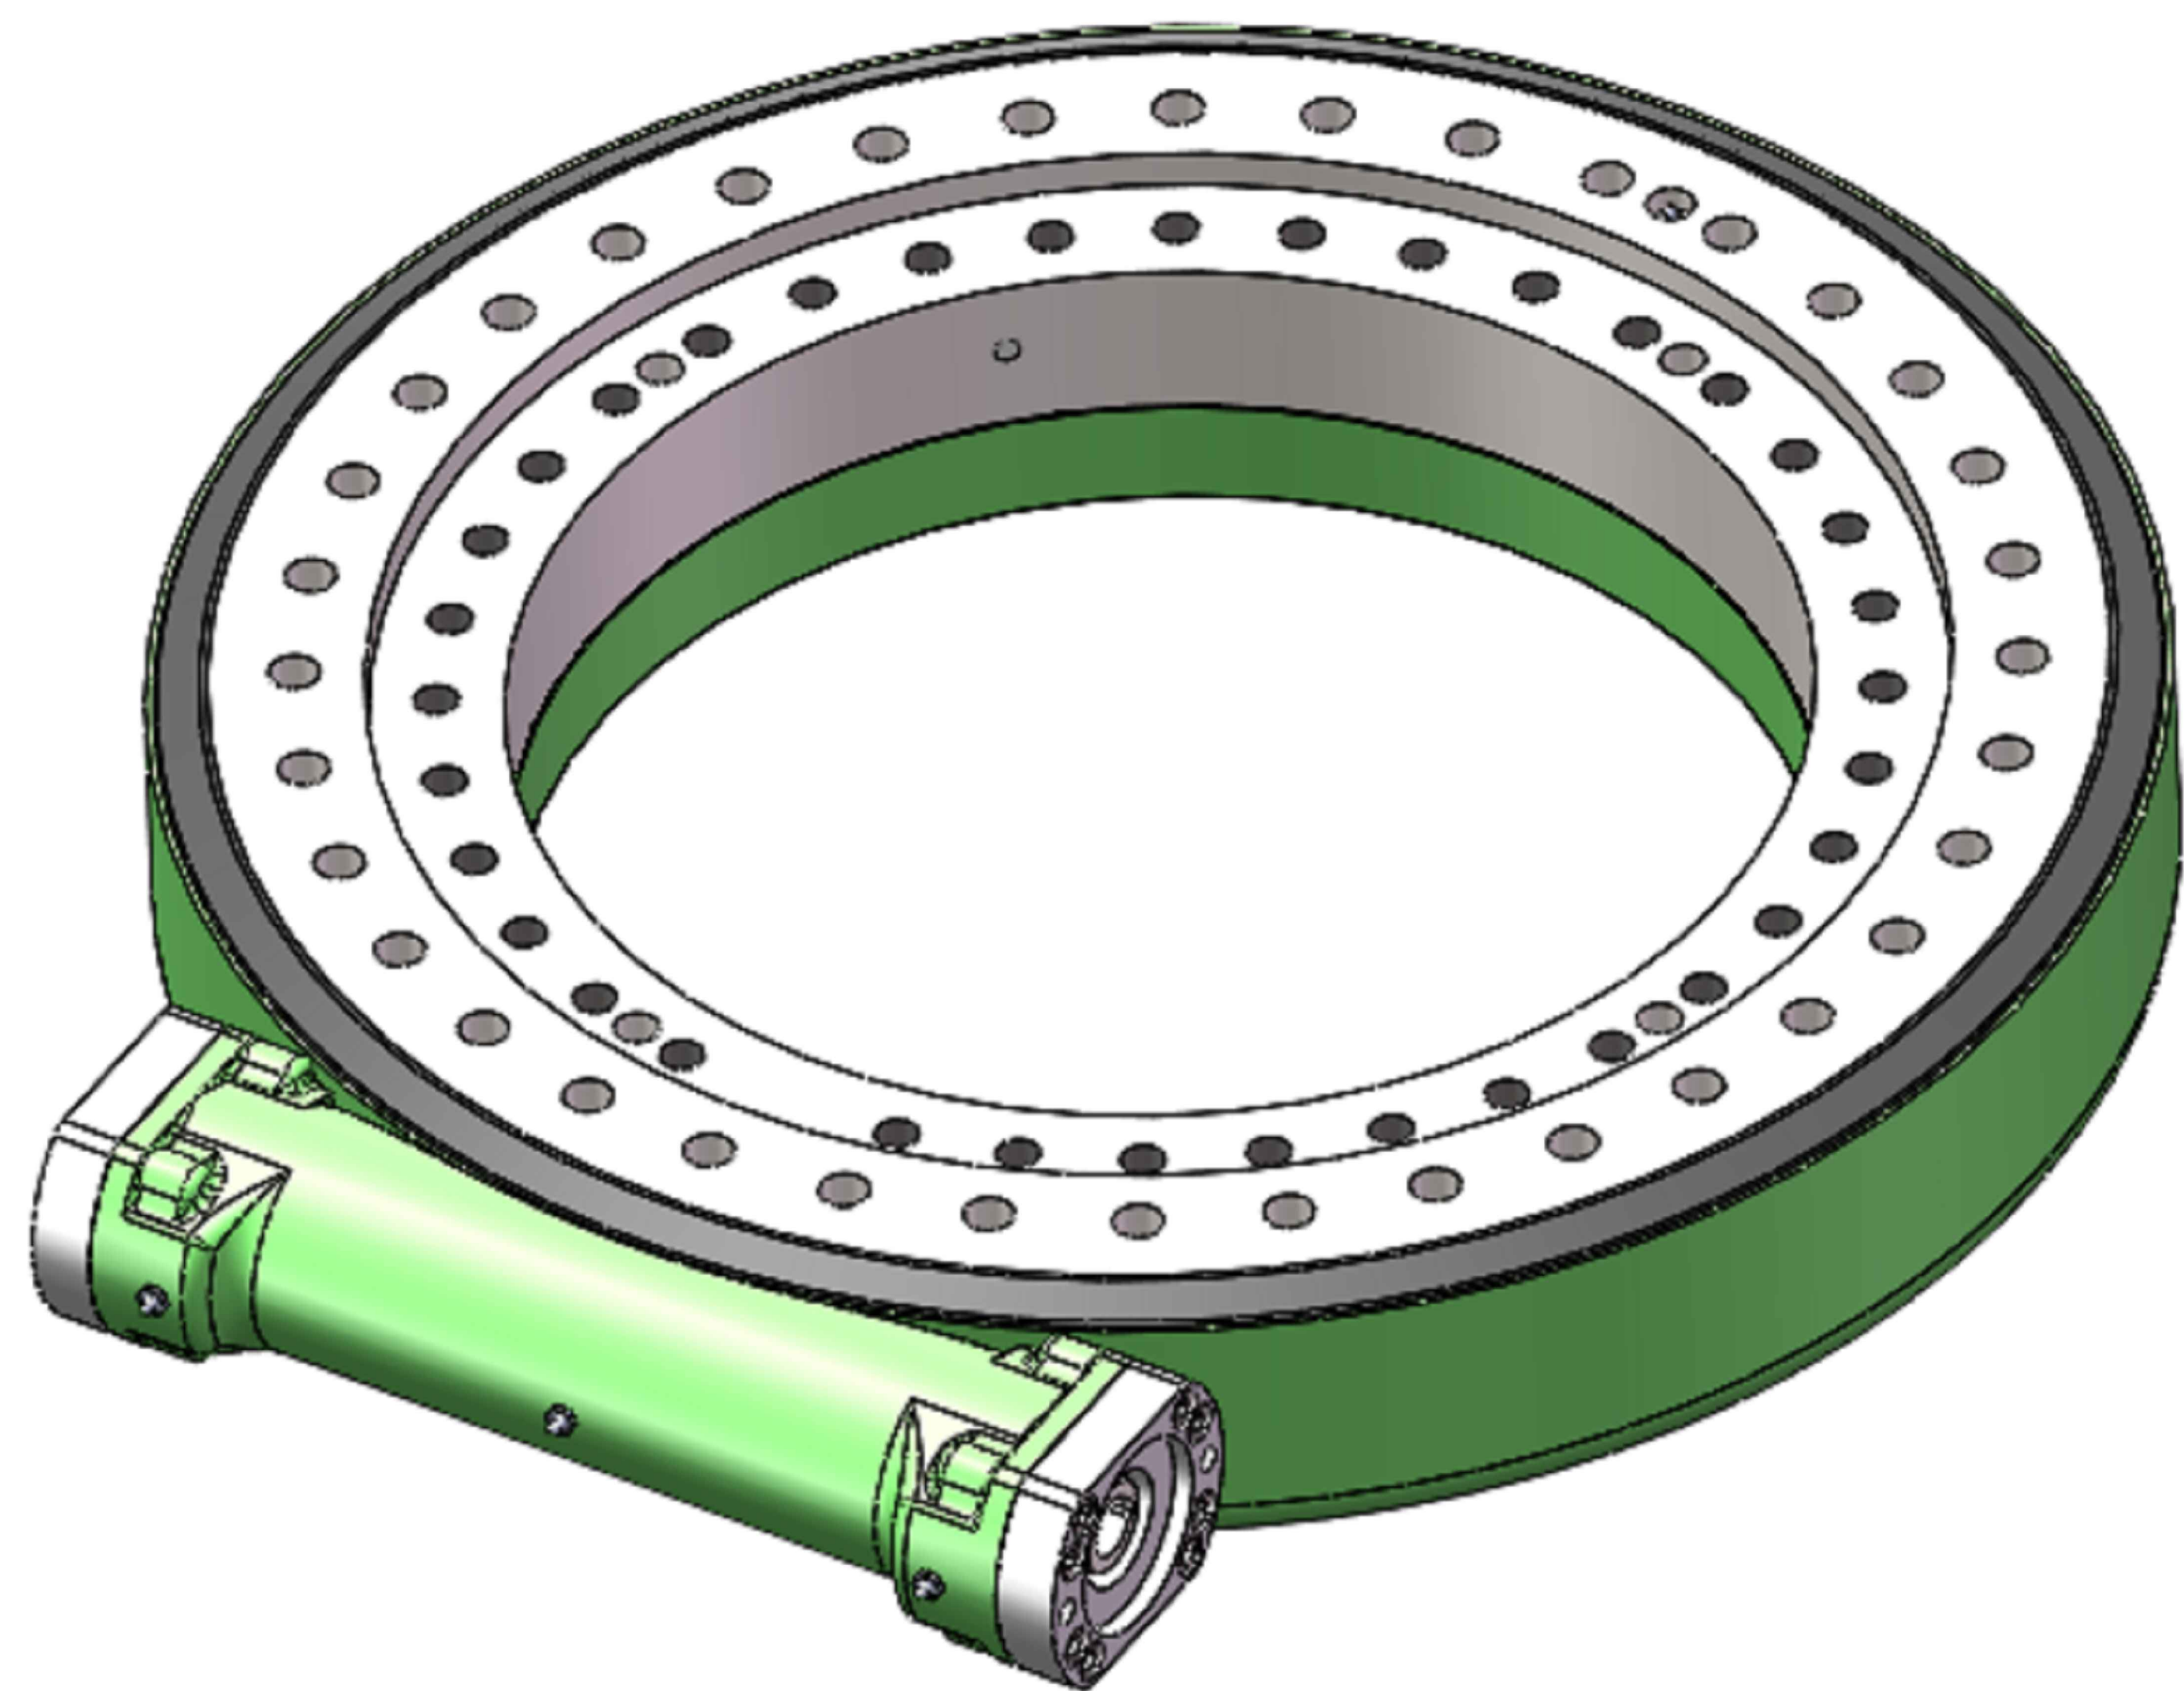

SC25

回转驱动性能参数

Slewing Drive Performance Parameters

减速比	Gear Ratio	150:1	
最大输出转矩	Output Torque (max.)	30 kN.m	22.1×10 ³ lbf.ft
最大倾覆力矩	Tilting Moment (max.)	203 kN.m	199.9×10 ³ lbf.ft
保持力矩	Holding Torque	158.3 kN.m	116.8×10 ³ lbf.ft
轴向静载荷	Static Axial Load Rating	2360 kN	531×10 ³ lbf
径向静载荷	Static Radial Load Rating	945 kN	212.6×10 ³ lbf
机械效率	Mechanical Efficiency	40%	
自锁性	Self-locking	可靠的静态自锁	Reliable static self-locking
精度	Precision	≤0.2°	
防护等级	IP Class	IP65	

承载力矩图
MOMENT LOAD CHART
轴向载荷 & 倾覆力矩
Axial Load & Tilting Moment

